

## **Lecture 14.**

### **Principles of active remote sensing: Radar.**

#### **Sensing of clouds and precipitation.**

##### **Objectives:**

1. Radar basics. Main types of radars.
2. Basic antenna parameters.
3. Particle backscattering and radar equation.
4. Sensing precipitation and clouds with ground-based and space-borne radars (weather radars, TRMM, and CloudSat).

##### **Required reading:**

S: 8.1, p.401-402, 5.7, 8.2.1, 8.2.2, 8.2.3, 8.3

##### **Additional/advanced reading:**

Tutorials on ground-based weather radars:

[http://www.srh.noaa.gov/srh/jetstream/doppler/doppler\\_intro.htm](http://www.srh.noaa.gov/srh/jetstream/doppler/doppler_intro.htm)

[http://www.weathertap.com/unprotected/static/radar\\_tutorial.html#inter2](http://www.weathertap.com/unprotected/static/radar_tutorial.html#inter2)

Tropical Rainfall Measuring Mission (TRMM) web site:

[http://www.eorc.jaxa.jp/hatoyama/satellite/satdata/trmm\\_e.html](http://www.eorc.jaxa.jp/hatoyama/satellite/satdata/trmm_e.html)

<http://trmm.gsfc.nasa.gov/>

CloudSat web site: <http://cloudsat.atmos.colostate.edu/>

CloudSat Data Center: <http://www.cloudsat.cira.colostate.edu/>

Stephens et al., 2002, The CloudSat mission and the A-Train: A new dimension of space-based observations of clouds and precipitation. BAMS, 1771-1790, 2002.

## 1. Radar basics. Main types of radars.

- Radar is an active remote sensing system operating at the microwave wavelength.
- Radar is a ranging instrument: (RAdio Detection And Ranging)

### Basic principles:

The sensor transmits a microwave (radio) signal towards a target and detects the backscattered radiation. The strength of the backscattered signal is measured to discriminate between different targets and the time delay between the transmitted and reflected signals determines the distance (or **range**) to the target.


- ✓ Two primary advantages of radars: **all-weather and day /night imaging**

### Radar modes of operation:

- Constant wave (CW) mode: continuous beam of electromagnetic radiation is transmitted and received => provides information about the path integrated backscattering radiation
- Pulsed mode: transmits short pulses (typically  $10^{-6}$ - $10^{-8}$  s) and measures backscattering radiation (also called echoes) as a function of range.

### Radar range resolution:

Consider a radar with pulse duration  $t_p$

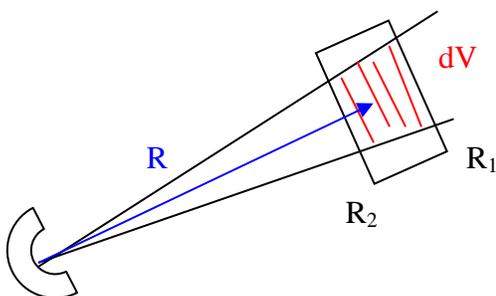

$$t - t_p/2 \Rightarrow R_2 = c (t - t_p/2)/2$$

$$t \Rightarrow R = ct/2$$

$$t + t_p/2 \Rightarrow R_1 = c (t + t_p/2)/2$$

Thus **radar range resolution is**

$$R_1 - R_2 = ct_p/2 = h/2 \quad [14.1]$$

where  $c$  is the speed of light.

**Problem:** A police pulsed speed-measuring radar must be able to resolve the returns from two cars separated by 10 m. Find the maximum pulse duration that can be used to prevent overlapping of the returns from the two vehicles. Ignore the Doppler effect.

**Solution:**

$$R_1 - R_2 = 10 \text{ m} \text{ thus } t_p = 2 * 10 \text{ m} / 3 * 10^8 \text{ m/s} = 6.67 * 10^{-7} \text{ s}$$

**Polarizing Radar** has four possible combinations of both transmit and receive polarizations as follows:

- HH - for horizontal transmit and horizontal receive,
- VV - for vertical transmit and vertical receive,
- HV - for horizontal transmit and vertical receive, and
- VH - for vertical transmit and horizontal receive.

**Microwave bands commonly used in radar remote sensing:** (see also Table 1.3, Lecture 1)

- Ka, K, and Ku bands: very short wavelengths used in early airborne radar systems but uncommon today.
- X-band: used extensively on airborne systems for military terrain mapping.
- C-band: common on many airborne research systems (CCRS Convair-580 and NASA AirSAR) and spaceborne systems (including ERS-1 and 2 and RADARSAT).
- S-band: used on board the Russian ALMAZ satellite.
- L-band: used onboard American SEASAT and Japanese JERS-1 satellites and NASA airborne system.
- P-band: longest radar wavelengths, used on NASA experimental airborne research system.

Types of radars:


➤ Non-imaging: (altimeters and scatterometers):

- **Altimeters** (often nadir-looking)

*Operation principles:* transmit short microwave pulses and measure the round trip time delay to targets to determine their distance from the sensor;

*Applications:* used on aircraft for altitude determination and on aircraft and satellites for topographic mapping, sea surface height measurements from which wind speed can be estimated

*Example:* ERS altimeter

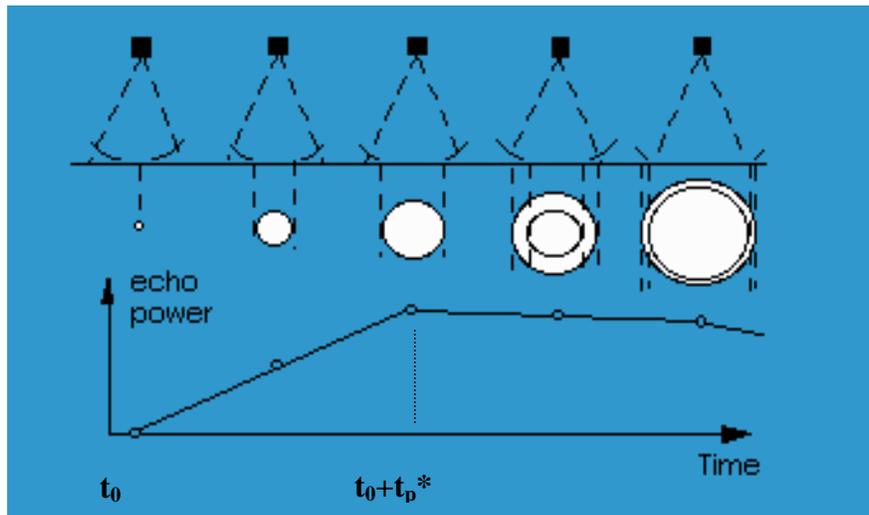

$$t_0 = 2H/c$$

$$t_p^* > t_p$$

$t_p$  is the duration of the pulse

**Figure 14.1** Reflection of an altimeter pulse from a flat surface. As the pulse advances, the illuminated area grows rapidly from a point to a disk, as does the returned power. Eventually, an annulus is formed and the geometry is such that the annulus area remains constant as the diameter increases. The returned signal strength, which depends on the reflecting area, grows rapidly until the annulus is formed, remains constant until the growing annulus reaches the edge of the radar beam, where it starts to diminish.

- **Scatterometers**

*Operation principles:* transmit microwave signal and measures the strength of the backscattering radiation (reflection);

*Applications:* measurements of wind speed and wind direction over the oceans. Ground-based scatterometers are used extensively to accurately measure the backscatter from various targets in order to characterize different materials and surface types.

*Example:* NASA Quick Scatterometer (QuikSCAT):


- Radar: 13.4 gigahertz; 110-watt pulse at 189-hertz pulse repetition frequency (PRF)
- Antenna: 1-meter-diameter rotating dish that produces two spot beams, sweeping in a circular pattern

*QuikSCAT measurement capability:*

- 1,800-kilometer swath during each orbit provides approximately 90-percent coverage of Earth's oceans every day.
- Wind-speed measurements of 3 to 20 m/s, with an accuracy of 2 m/s; direction, with an accuracy of 20 degrees. Wind vector resolution of 25 km.

➤ **Imaging radars:**

The two-dimensional representation of imaging sensors:

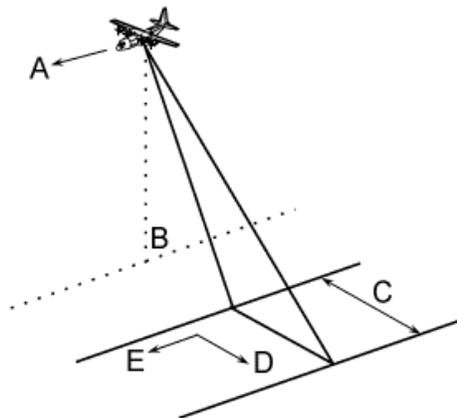

*Side-looking viewing geometry of imaging radar systems:*


The platform travels forward in the **flight direction** (A) with the **nadir** (B) directly beneath the platform. The microwave beam is transmitted obliquely at right angles to the direction of flight illuminating a **swath** (C). **Range** (D) refers to the across-track dimension perpendicular to the flight direction, while **azimuth** (E) refers to the along-track dimension parallel to the flight direction.

## 2. Basic antenna parameters.

Antenna is a structure which serves as a transition between wave propagating in free space and the fluctuating voltages in the circuit to which it is connected.

Basic antenna parameters (in free space):

- 1) Field pattern: 3-D quantities involving the variation of EM field or EM power as a function of the spherical coordinates  $\theta$  and  $\varphi$ : power pattern  $P(\theta, \varphi)$  (in  $\text{W sr}^{-1}$ ) and normalized power pattern:  $P_n(\theta, \varphi) = P(\theta, \varphi) / P_{max}(\theta, \varphi)$

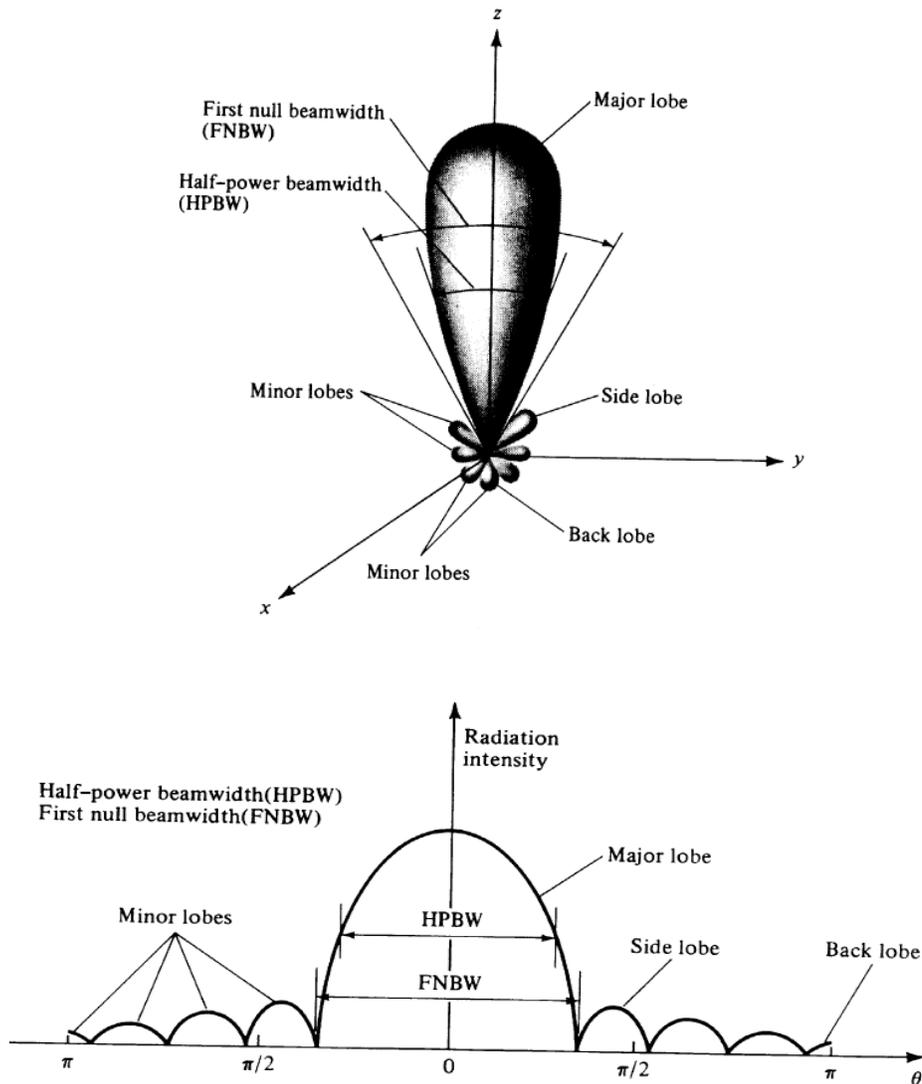

**Figure 14.2** Antenna power pattern in polar coordinates and in rectangular coordinates.

**NOTE:** “same name”: Major lobe=Main lobe = Main beam

Since the difference between the power transmitted by an antenna,  $P_t$  (in W), and the power received from backscattering is typically several orders of magnitude, the received signal is expressed in **Decibels (dB)**:

$$P(\text{in dB}) = 10 \log \frac{P}{P_t} \quad [14.2]$$

- 2) **Antenna gain** is defined as the ratio of the intensity at the peak of the transmission pattern,  $I_p$ , to an isotropic intensity that is derived assuming that the total power,  $P_t$  (in W), is distributed equally in all direction

$$G = \frac{I_p}{P_t / 4\pi R^2} \quad [14.3]$$

$R$  is the range.

- 3) **Beam area (or beam solid angle)** (in sr) is defined as

$$\Omega_A = \int_{4\pi} P_n(\theta, \varphi) d\Omega \quad [14.4]$$

The beam area is a solid angle through which all of the power radiated by the antenna would stream if  $P(\theta, \varphi)$  maintained its maximum value over  $\Omega_A$  and was zero elsewhere  $\Rightarrow$  **Power radiated** (in W) =  $P_{max}(\theta, \varphi) \Omega_A$

The beam area can be approximated by the product of the half-power beamwidths (HPBW, see Fig.14.2) in two principal planes

$$\Omega_A \approx \theta_{HP} \varphi_{HP} \quad [14.5]$$

where  $\theta_{HP}$  is  $\Delta\theta$  of the HPBW and  $\varphi_{HP}$  is the  $\Delta\varphi$  of the HPBW.

- 4) **Effective aperture**,  $A_e$ , (in  $m^2$ ) is defined as

$$\lambda^2 = A_e \Omega_A \quad [14.6]$$

where  $\lambda$  is the wavelength (in m)

5) **Directivity, D**, ( $\geq 1$ , dimensionless) is defined as the ratio of the maximum power to its average value:  $D = P_{max}(\theta, \varphi) / P_{av}(\theta, \varphi)$

Other expressions for the **directivity**

$$D = \frac{4\pi}{\Omega_A} \quad \text{directivity from pattern} \quad [14.7]$$

$$D = 4\pi \frac{A_e}{\lambda^2} \quad \text{directivity from aperture} \quad [14.8]$$

➤ **Friis transmission formula**

Consider a transmitting antenna of effective aperture  $A_{et}$  and receiving antenna with effective aperture  $A_{er}$ . The distance between the antennas is  $R$ .

If transmitted power  $P_t$  is radiated by an isotropic source, the power received per unit area at the receiving antenna is

$$F = \frac{P_t}{4\pi R^2} \quad [14.9]$$

and the power available to the receiver is

$$P_r = FA_{er} \quad [14.10]$$

But the transmitting antenna has an effective aperture  $A_{et}$  and hence a directivity  $D$  (from Eq.[14.8]):

$$D = 4\pi \frac{A_{et}}{\lambda^2}$$

Thus the power available to the receiver is  $D$  times greater

$$P_r = FA_{er} D = FA_{er} \frac{4\pi A_{et}}{\lambda^2} \quad [14.11]$$

Substituting Eq.[14.9] into Eq.[14.11] gives

$$P_r = \frac{P_t A_{er}}{4\pi R^2} \frac{4\pi A_{et}}{\lambda^2} \quad [14.12]$$

or

$$\boxed{\frac{P_r}{P_t} = \frac{A_{er}}{R^2} \frac{A_{et}}{\lambda^2}} \quad [14.13]$$

### **3. Particle backscattering and radar equation.**

Recall Lecture 6 in which we introduced the **efficiencies (or efficiency factors), cross-sections and volume coefficients** for extinction, scattering and absorption. Let's introduce backscattering characteristics needed in active remote sensing (radar and lidars).

**Differential scattering cross-section,  $\sigma_d$** , is defined as the amount of incident radiation scattered into the direction  $\Theta$  per unit of solid angle

$$\sigma_d(\Theta) = \frac{\sigma_s}{4\pi} P(\Theta) \quad [14.14]$$

where  $P(\Theta)$  is the scattering phase function

**Bistatic scattering cross-section,  $\sigma_{bi}$** , is defined as

$$\sigma_{bi} = 4\pi\sigma_d(\Theta) \quad [14.15]$$

**Backscattering cross-section,  $\sigma_b$** , is defined as

$$\sigma_b = 4\pi\sigma_d(\Theta = 180^\circ) \quad [14.16]$$

Using Eq.[14.14], Eq.[14.16] can be re-written as

$$\sigma_b = \sigma_s P(\Theta = 180^\circ) \quad [14.17]$$

Recall that the incident intensity  $I_i$  and scattered intensity  $I_s$  by a particle relates as

$$I_s(\Theta) = I_i \frac{\sigma_s}{R^2} \frac{P(\Theta)}{4\pi} \quad [14.18]$$

where  $R$  is the distance from the particle.

For the backscattering case, we can write

$$F_{bs}(\Theta = 180^\circ) = F_i \frac{\sigma_s}{R^2} \frac{P(\Theta = 180^\circ)}{4\pi} \quad [14.19]$$

or

$$F_{bs}(\Theta = 180^\circ) 4\pi R^2 = F_i \sigma_b \quad [14.20]$$

Thus, the physical meaning of the back-scattering cross-section is the area that, when multiplied by the incident flux, gives the total power radiated by an isotropic source such that it radiates the same power in the backward direction as the scatterer.

For the particle number size distribution  $N(r)$ , the **backscattering volume coefficient,  $\kappa_b$** , is

$$k_b = \int_{r_1}^{r_2} \sigma_b(r) N(r) dr \quad [14.21]$$

and thus

$$k_b = k_s P(\Theta = 180^\circ) \quad [14.22]$$

where  $P(\Theta)$  is the scattering phase function averaged over the size distribution.


Small size parameter limit (Rayleigh limit): it can be shown from Mie theory (see S: 5.7.1) that

$$\sigma_b = \frac{\pi^5}{\lambda^4} |K|^2 D^6 \quad [14.23]$$

where  $|K| = \left| \frac{m^2 - 1}{m^2 + 2} \right|$ ;  $m$  is the refractive index of the particle; and  $D$  is the particle diameter.

### ➤ Radar equation

Consider a transmitting radar with an antenna of effective aperture  $A_{et}$  and pulse duration  $t_p$  (or length  $h=ct_p$ ). The radar illuminates an object (e.g., a cloud) at the distance  $R$ . Suppose that the object has the backscattering cross-section (called radar cross-section)  $\sigma_r$ .

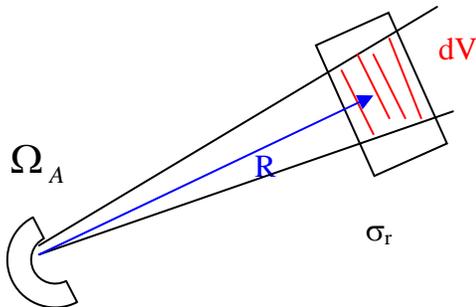

Using the Friis transmission formula, we can find the power intercepted by the object  $P_{\text{int}}$  as

$$P_{\text{int}} (\text{by object}) = \frac{P_t}{R^2} \frac{A_{\text{et}}}{\lambda^2} \sigma_r \quad [14.24]$$

Using that the scattering object can be considered as an isotropic source such that it radiates the same power in the backward direction, it has directivity  $D=1$  and effective aperture  $A_e = \lambda^2/4\pi$  (see Eq.[14.8]). And using the Friis transmission formula, we can find the power received by the antenna

$$P_r = \frac{P_{\text{int}} (\text{by object}) A_{\text{er}}}{R^2 \lambda^2} \frac{\lambda^2}{4\pi} \quad [14.25]$$

Substituting Eq.[14.24] into Eq.[14.25], we obtain the **radar equation**

$$\boxed{\frac{P_r}{P_t} = \frac{A^2}{4\pi R^4} \frac{\sigma_r}{\lambda^2}} \quad [14.26]$$

where  $A = A_{\text{et}} = A_{\text{er}}$  is the effective aperture of antenna (same for transmitting and receiving).

If the object is a cloud with size distribution  $N(r)$  and the volume backscattering coefficient  $k_b$ . The power backscattered by the volume  $dV$  and received by a radar (or a lidar) can be expressed as

$$\frac{P_r}{P_t} = \frac{A^2}{4\pi R^4} \frac{k_b dV}{\lambda^2} \quad [14.27]$$

From radar beam geometry, the illuminated volume can be approximated as

$$dV \approx R^2 \theta_{\text{HP}} \varphi_{\text{HP}} h / 2 \quad [14.28]$$

and using Eq.[14.21] for  $k_b$ , we have

$$\frac{P_r}{P_t} = \frac{A^2}{4\pi R^2 \lambda^2} \frac{h \theta_{\text{HP}} \varphi_{\text{HP}}}{2} \int \sigma_b(r) N(r) dr \quad [14.29]$$

Assuming that particle are in the **Rayleigh limit** and using Eq.[14.23], we have

$$\frac{P_r}{P_t} = \frac{\pi^4 A^2}{4\lambda^6} \frac{h\theta_{HP}\phi_{HP}}{R^2} |K|^2 \int D^6 N(D) dD \quad [14.30]$$

the above equation can be re-written as

$$\boxed{P_r = C \frac{|K|^2}{R^2} Z} \quad [14.31]$$

where factor C depends on the antenna characteristics; and

$Z = \int D^6 N(D) dD$  is called the **radar reflectivity factor**.

**NOTE:** Eq.[14.31] is often called the radar equation.

The backscattering coefficient and radar reflectivity relates as

$$k_b = \int \sigma_b(D) N(D) dD = \int \frac{\pi^5}{\lambda^4} |K|^2 D^6 N(D) dD = \frac{\pi^5}{\lambda^4} |K|^2 \int D^6 N(D) dD = \frac{\pi^5}{\lambda^4} |K|^2 Z \quad [14.32]$$

- If particle are not in the Rayleigh limit and/or nonspherical (e.g., ice crystals), the effective radar reflectivity factor,  $Z_e$ , is introduced.
- In the more general case, Eq.[14.31] must be corrected to account for the attenuation along the path to and from the scattered volume (a cloud) (i.e., attenuation may arise from absorption by atmospheric gases, absorption by cloud drops and precipitation):

$$\bar{P}_r = C \frac{|K|^2}{R^2} Z \exp\left(-2 \int_0^R k_e(r') dr'\right) \quad [14.33]$$

where  $k_e$  is the extinction coefficient along the path.

#### **4. Sensing precipitation and clouds with radars.**

**Principles:** use a relationship between the radar reflectivity factor  $Z$  (or  $Z_e$ ) and the rainfall rate,  $Rr$  (mm/hour) in the form (called Z-R relationships)

$$Z = A Rr^b \quad [14.34]$$

where  $A$  and  $b$  are constants depending on the type of rains.

**Empirical Z-R relationships** ( $Rr$  in (mm/h) and  $Z$  in ( $\text{mm}^6\text{m}^{-3}$ )):

$$\text{Stratiform rain: } Z = 200 Rr^{1.6} \quad [14.35]$$

$$\text{Orographic rain: } Z = 31 Rr^{1.71} \quad [14.36]$$

$$\text{Snow: } Z = 2000 Rr^2 \quad [14.37]$$

The power returned to a radar (see Eq.[14.31]) can be normalized using Eq.[14.2] :

$$P_r (\text{in dBZ}) = 10 \log \frac{P_r}{P_{ref}} \quad [14.38]$$

where  $P_{ref}$  is the reference power which is often taken to be that power which would be returned if each  $\text{m}^3$  of the atmosphere contained one drop with  $D= 1 \text{ mm}$  ( $Z = 1 \text{ mm}^6\text{m}^{-3}$ ).

**NOTE:** The higher the dBZ value, the more power is reflected and received by the radar. Light snow is very inefficient at reflecting radiation, so it might be 5-20 dBZ, while moderate rain might be 30-45 dBZ, and large hail might be around 60-75 dBZ.


NOTE: dBZ values can be negative if  $Z < 1$ .

NOTE: Retrievals of precipitation from radars depend on an assumed Z-R relationship.

➤ National Weather Service radars (<http://radar.weather.gov/>)

The National Weather Service (NWS) Weather Surveillance Radars (WSR) are of three types: WSR-57S, WSR-74C, and WSR-88D (D stands a Doppler radar)

Radars	Wavelength (cm)	Dish Diameter (feet)	Pulse (microsecond)
WSR-57	10.3	12	0.5 or 4
WSR-74C	5.4	8	3
WSR-88D	11.1	28	1.57 or 4.5

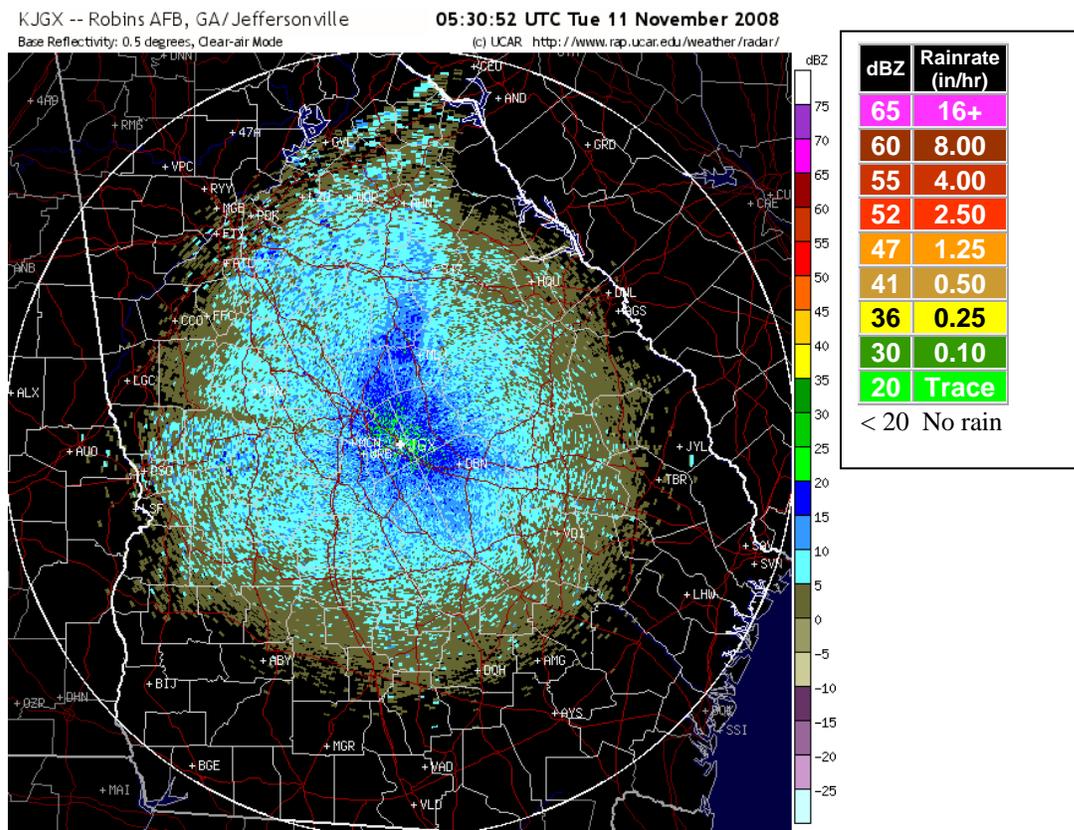

Example of a WSR radar image for Georgia, 11 Nov. 2008: Clear-air mode - no precip.

➤ **Space radars: TRMM and CloudSat:**

**TRMM radar**- first radar in space (launched in 1997).

- 13.8 GHz, 4.3-km footprint, 250-m vertical resolution, 1.67  $\mu$ s pulse duration, cross-track scanning, 215-km swath.

➤ **CloudSat radar: Cloud Profiling Radar (CPR) (launched on 28 April 2006):**


- 94-GHz nadir-looking radar which measures the power backscattered by clouds as a function of distance from the radar;

CPR System Characteristics

Nominal Frequency	94 GHz
Pulse Width	3.3 $\mu$ sec
PRF	4300 Hz
Minimum Detectable $Z^*$	-26 dBZ
Antenna Size	1.95 m
Dynamic Range	70 dB
Integration Time	0.3 sec
Vertical Resolution	500 m
Cross-track Resolution	1.4 km
Along-track Resolution	2.5 km

The primary science objectives:

- Quantitatively evaluate the representation of clouds and cloud processes in global atmospheric circulation models, leading to improvements in both weather forecasting and climate prediction;
- Quantitatively evaluate the relationship between the vertical profiles of cloud liquid water and ice content and the radiative heating by clouds.

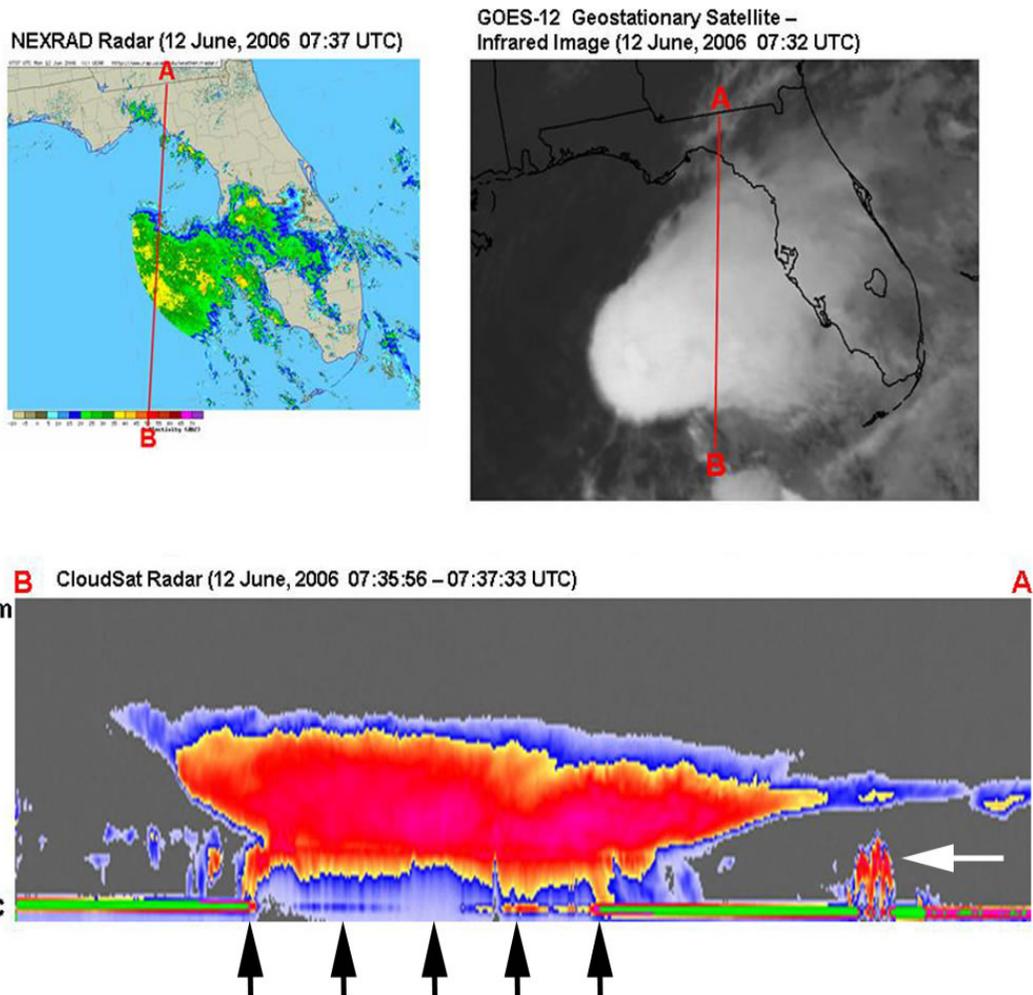

**Figure 14.3** Tropical storm, Alberto, over the Gulf of Mexico. The collection of images reveals how CloudSat "sees" the storm differently from other weather satellites and sensors. The NEXRAD storm detection radar is limited by distance, preventing it from mapping all of the storm's precipitation. The infrared imager on the GOES-12 satellite can detect cloud cover but cannot provide details beneath the storm's cloud tops. Data collected by CloudSat reveal the true height and extent of the storm. Very heavy rainfall (black arrows) was detected over about 400 kilometers of the satellite's track. CloudSat also located a smaller thunderstorm (white arrow) hidden under the clouds.